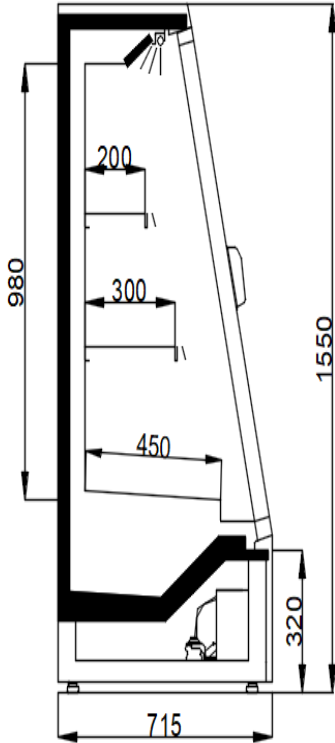
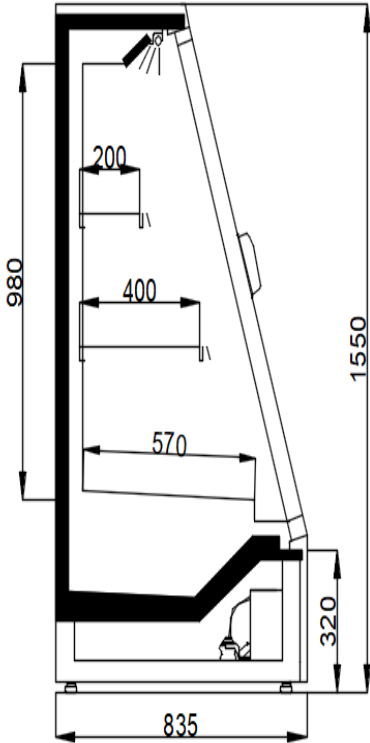


CROSS-SECTION	INFORMATION
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p><b>Macon</b> <b>53.A10.D-SGD</b></p>  </div> <div style="text-align: center;"> <p><b>Macon</b> <b>63.A10.D-SGD</b></p>  </div> </div>	<p>MAIN symbol: MACON code: 3M1-R290 temp. class: 3M1 refrig. supply: plug-in refrigerant: R290</p> <p>DEFROSTING defrosting type:TIMING DEFROSTING</p> <p>FANS fans: room type: WELLINGTON lighting: horizontal</p>

EXPOSITION SURFACES							
surface	*	rows number	product	width [mm]	load height [mm]	angle [°]	load [kg/m <sup>2</sup> ]
hanged shelf (53-63)	1	1	normal	200 - 200	330 - 330	0	100
hanged shelf (53-63)	2	1	normal	300 - 400	270 - 270	0	100
bottom shelf (53-63)	3	1	normal	450 - 570	295 - 295	92,5	200

CHARACTERISTIC						
module	*	[m]	1250	1875	2500	
MODULE LENGTH	4	[mm]	1250	1875	2500	
TOTAL DISPLAY AREA (TDA) (53-63)	5	[m <sup>2</sup> ]	1,59 - 1,62	2,39 - 2,42	3,18 - 3,23	
VISIBILITY OF PRODUCTS (VPA)	6	[m <sup>2</sup> ]	1,25	1,87	2,5	
NET VOLUME (53-63)	7	[dm <sup>3</sup> ]	715 - 923	1075 - 1379	1431 - 1841	
NET WEIGHT	8	[kg]	-	-	-	

**NOTICE**  
\* development version  
The information included in the Technical Data of device refers to certain equipment defined in the first page.  
All values and parameters are defined on the basis of standard TS EN ISO 23953 for the given temperature class, range of temperature and equipment

**RECOMMENDATIONS**  
The correct work of devices enables its non-failure work with energetical rated parameters  
Complying with the rules of device loading guarantees the stable temperature parameters of stored products  
Properly selected operating parameters allow you to greatly reduce the cost of electricity consumption.  
THE MANUFACTURER INANC TEKNIK MAKES NO WARRANTY AND TECHNICAL SPECIFICATIONS OF ITS PRODUCTS.

AMBIENT PARAMETERS			
1	climate class	-	3
2	max. ambient temperature	[°C]	25
3	max. ambient humidity	[%]	60
4	illumination	[lux]	200
5	max. ambient air speed	[m/s]	0.2

DEVICE WORKING PARAMETERS			
6	device temperature class	-	M1
7	cabinet temperature	[°C]	-1...+7
8	refr. evaporating / condensing temp.	[°C]	-10 / +45
9	suction superheat / overcolling	[K]	- / -
10	refrigerant	R290	

COOLING DATA					
module	*	[m]	1250	1875	2500
UNIT COOLING CAPACITY	11	[W]	739	1165	1165
INLET TUBE	12	[mm]	6	6	6
OUTLET TUBE	13	[mm]	10	10	10
REFRIGERANT FLUID	14	[kg]	0,11	0,20	0,20

ELECTRICAL DATA					
module	*	[m]	1250	1875	2500
POWER SUPPLY	15	[V/Hz]	-230/50	-230/50	-230/50
COMPRESSOR	16	[W]	342	556	556
	17	[A]	1,55	2,52	2,52
DEFROSTING,	18	[W]	-	-	-
	19	[A]	-	-	-
FANS	20	[W]	8	16	24
	21	[A]	0,04	0,08	0,11
LIGHTING	22	[W]	15	24	30
	23	[A]	0,07	0,11	0,14
HEATERS	24	[W]	-	-	-
	25	[A]	-	-	-

RATED DATA					
module	*	[m]	1250	1875	2500
POWER RATE, CURRENT	26	[W]	365	596	610
	27	[A]	1,66	2,71	2,77

ELECTRICAL CONSUMPTION					
module	*	[m]	1250	1875	2500
TEC	28	Wh/24h	4 KW	6 KW	8 KW

ELECTRICAL CONSUMPTION					
module	*	[m]	1250	1875	2500
EEl	29	Wh/24h	13,3 - 13,2	15,4 - 15,2	16,6 - 16,4

WORKING PARAMETERS							
30	defrosting time	[h/24h]	0.6	32	working time of heaters	[h/24h]	2.4
31	working time of fans	[h/24h]	2.4	33	working time of lighting	[h/24h]	1.2

PARAMETERS OF ELECTRICAL TERMINALS							
34	power supply P+N+PE	[V/Hz]	-230/50	35	electrical connection - plug-in socket	-	230V/16A

CONTROLLING PARAMETERS							
1	set point ST	[°C]	3	6	correction ST by night	[°C]	-
2	differential ST	[°C]	2	7	defrosting number	[il/24h]	4
3	set point correction ST	[°C]	2	8	temperature of defrosting end	[°C]	8
4	fan running during defrosting	[yes/no]	yes	9	maximum time of defrosting	[min]	45
5	stop fans temperature	[°C]	-	10	dripping time	[min]	2

TEC - TOTAL ENERGY CONSUMPTION

NOTICE  
\* development version  
In the devices with night curtain or covers, the covering time is 12h.